



SWEDISH MANUFACTURED PRODUCTS  
FOR BAKERS WITH HIGH DEMANDS

- LOW OVERALL HEIGHT
- EASY TO ASSEMBLE
- EASY TO OPERATE



*Provematic*

Prover and Retarder-prover






## BAKERS' BEST FRIEND

With a reliable prover or a retarder-prover from ABBU you can avoid the early and strenuous morning hours in the bakery. You simply load the racks and easily roll them into the retarder-prover in the afternoon. When you arrive the following day the fermentation is done.

Regardless of rack size there are several sizes of retarder-provers to choose from, all depending on your specific needs and space that is available. The front and the inside of our retarder-provers are coated with stainless steel. All other sides are coated with aluminum.

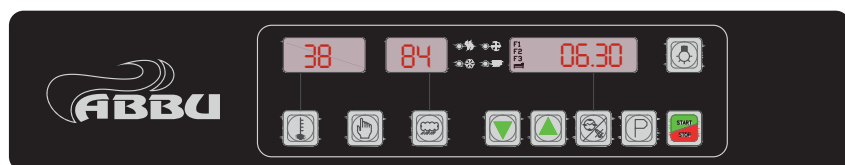


## EASY TO OPERATE

The control panel allows you either to operate the fermentation process with automatic settings or by manual control. Temperature, humidity, resting time and point of time when the goods are ready are easily put in via the control panel. Humidity can also be provided during cooling phase.

## OPTIONS FOR PROVEMATIC

- Door glass windows
- Lights
- Increased total height
- Floor heating (reduces the inner height by 20 mm)
- Tunnel configuration (doors at both ends)

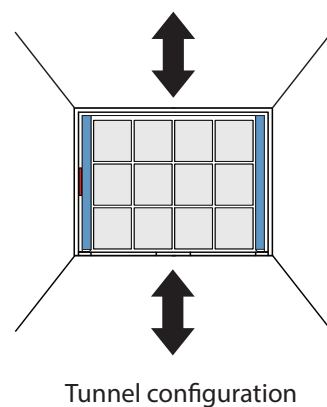


# PROVEMATIC SCANDINAVIA

**Rack size 520x600 mm  
or 540x630 mm**

Provematic Scandinavia is designed for the Scandinavian market and it is somewhat smaller rack size.

Provematic Scandinavia is fitted with cooling equipment in its standard design, but can also be delivered without and then only be used as a prover. It can also be adapted for bakeries with central cooling.

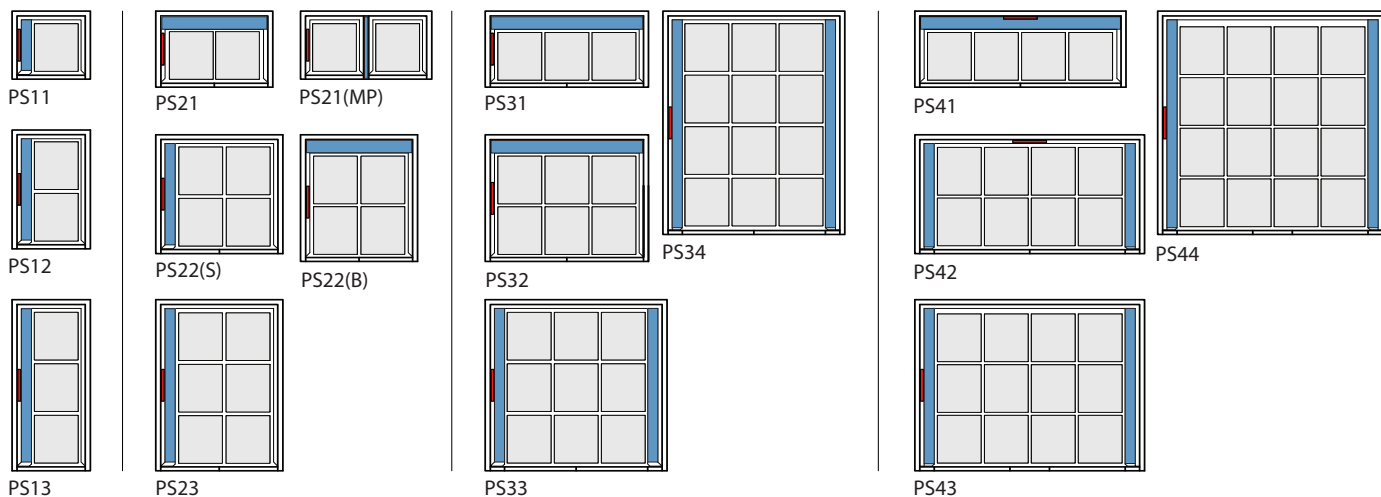

Model	Qty. Racks	Width ext. (mm)	Free width int. (mm)	Depth ext. (mm)	Free depth int. (mm)	Heat- power (kW)	Placement of cooling eq.
PS11	1	930	580	860	680	3,3	Left side
PS12	2	930	580	1500	1320	3,3	Left side
PS13	3	930	580	2160	1980	4,3	Left side
PS21	2	1390	1160	960	680	3,3	Rear
PS21(MP)	2	1560	2x580	860	680	3,3	Middle
PS22(B)	4	1390	1160	1600	1320	6,5	Rear
PS22(S)	4	1510	1160	1500	1320	6,5	Left side
PS23	6	1510	1160	2160	1980	6,5	Left side
PS31	3	1940	1710	960	680	4,3	Rear
PS32	6	1940	1710	1600	1320	6,5	Rear
PS33	9	2160	1710	2160	1980	8,5	Both sides
PS34	12	2160	1710	2820	2640	11,5	Both sides
PS41	4	2510	2280	960	680	6,5	Rear
PS42	8	2730	2280	1500	1320	8,5	Both sides
PS43	12	2730	2280	2160	1980	11,5	Both sides
PS44	16	2730	2280	2820	2640	11,5	Both sides

Height: ext. 2150 mm (excluding cooling compressor) int. 1905 mm  
(MP): Midpost (B): Cooling battery rear (S): Cooling battery side



# Provematic

## PROVEMATIC GLOBAL

**Rack size 575x762 mm  
or 670x800 mm**

Provematic Global is adapted to work well with slightly larger racks, unlike Promatic Scandinavia.



Model	Qty. Racks	Width ext. (mm)	Free width int. (mm)	Depth ext. (mm)	Free depth int. (mm)	Heat- power (kW)	Placement of cooling eq.
PG11	1	1110	770	1060	900	3,3	Left side
PG12	2	1110	770	1940	1780	4,3	Left side
PG13	3	1110	770	2820	2640	5,3	Left side
PG21	2	1710	1490	1180	900	4,3	Rear
PG22	4	1940	1490	1940	1780	8,5	Both sides
PG23	6	1940	1490	2820	2640	10,5	Both sides
PG31	3	2440	2220	1180	900	5,3	Rear
PG32	6	2730	2280	2160	1980	10,5	Both sides
PG33	9	2730	2280	2820	2640	11,5	Both sides

Hight: ext. 2150 mm (excluding cooling compressor) int. 1905 mm



**AB Borås Ungstjänst**

Kypered 3  
504 90 Borås  
[www.abbu.se](http://www.abbu.se)

Tel: + 46 (0)33 24 31 08  
Fax: + 46 (0)33 24 31 08  
[mail@abbu.se](mailto:mail@abbu.se)